# **OUTDOORED-450-AB**

Correction time: 25/11

Aluminum pole standing LED advertising billboard for outdoor 4500cd/m2







### **Outdoor Waterproof**



The IP56 rating provide full protection against dust and water projection. Built in intelligent heating and cooling, together with a smart automatic air circulation system.



#### Glasslessdesign

Noglassshielding, candirectly solve the problem of solar reflection, the heat infront of the module can also be quickly dissipated



#### Sunlight Readable Image

Adjusts the brightness of the monitor automatically according to the surrounding lighting conditions. This feature considerably reduces power consumption and increases the monitor's lifetime.



#### Modular transportation

Support for unpacking and shipping. The access ories are clearly categorized and packaged. Once received, they can be easily assembled and the installation can be completed quickly and effortlessly.

### FOR MORE INFORMATION



# **Product Parameters**




Model No.	2.97	3.91
Pixel Pitch	2.976mm	3.91mm
Pixel Density(One side)	1,354,752	784,920
LED Encapsulation	SMD1415	SMD1921
Scan Mode	1/21 scan	1/16 scan
Display size	4000x3000	
Refresh Rate (Hz)	3840Hz	
Frame rate	60Hz	
Brightness(nits)	≥4,500	
Max. Power Consumption(W/m²)	18,500	
Ave. Power Consumption(W/m²)	6,500	
Color temperature	3000-18000K	
Work environment temperature	-20°C ~ +60°C	
Degree of Protection	Front IP56	
Service	Front Service	
Power Supply	AC120/ 240V (50Hz)(optional)	

## FOR MORE INFORMATION



# Dimensional and structural drawings




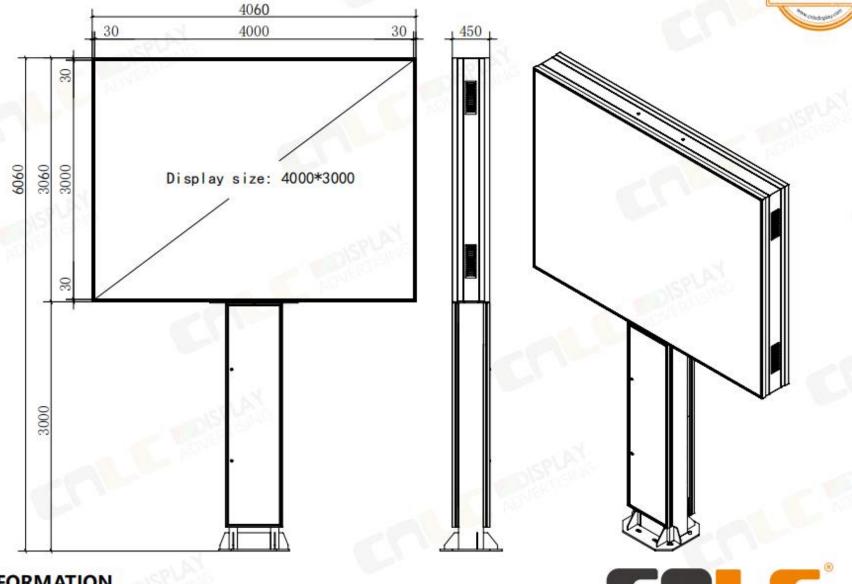


### FOR MORE INFORMATION






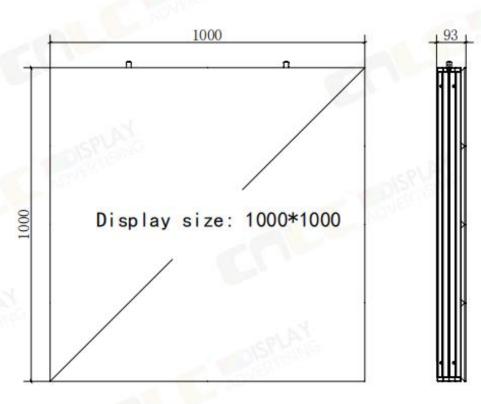

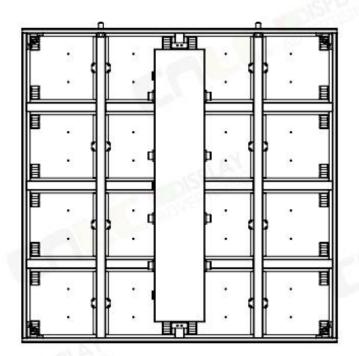

# FOR MORE INFORMATION



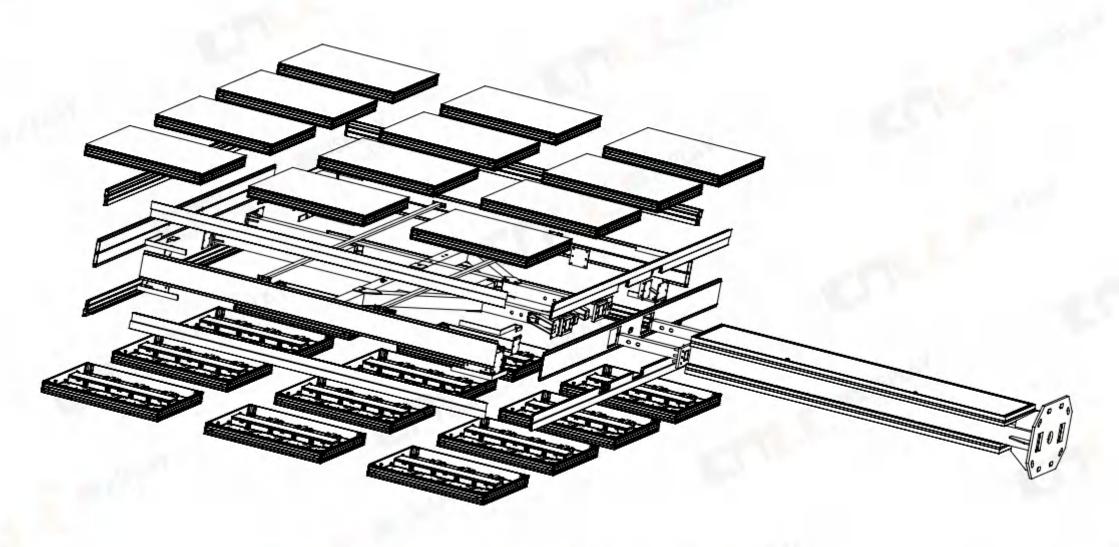

Modular shipping, with the customer assembling it themselves

### FOR MORE INFORMATION

