



CNLC-LED-OD-125-WA


5000nits high-brightness single-sided wall-mounted LED totem outdoor



Aluminum corrosion-resistant outer shell

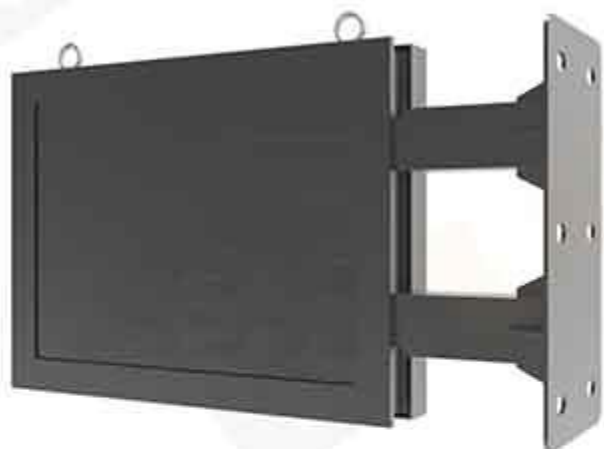

No glass to prevent reflection



15 mm ultra-thin bezel



Commercial Grade



Brightness > 5000CD/m²



IP65 level of protection rating



Resistant to environmental temperature




Remote status monitoring

FOR MORE INFORMATION

For more information about CNLC, visit our website at www.cnlcdisplay.com. Copyright © cnlcdisplay All rights reserved. All specifications and descriptions are subject to change without notice. Reproduction without permission is prohibited.



Dimensional and structural drawings

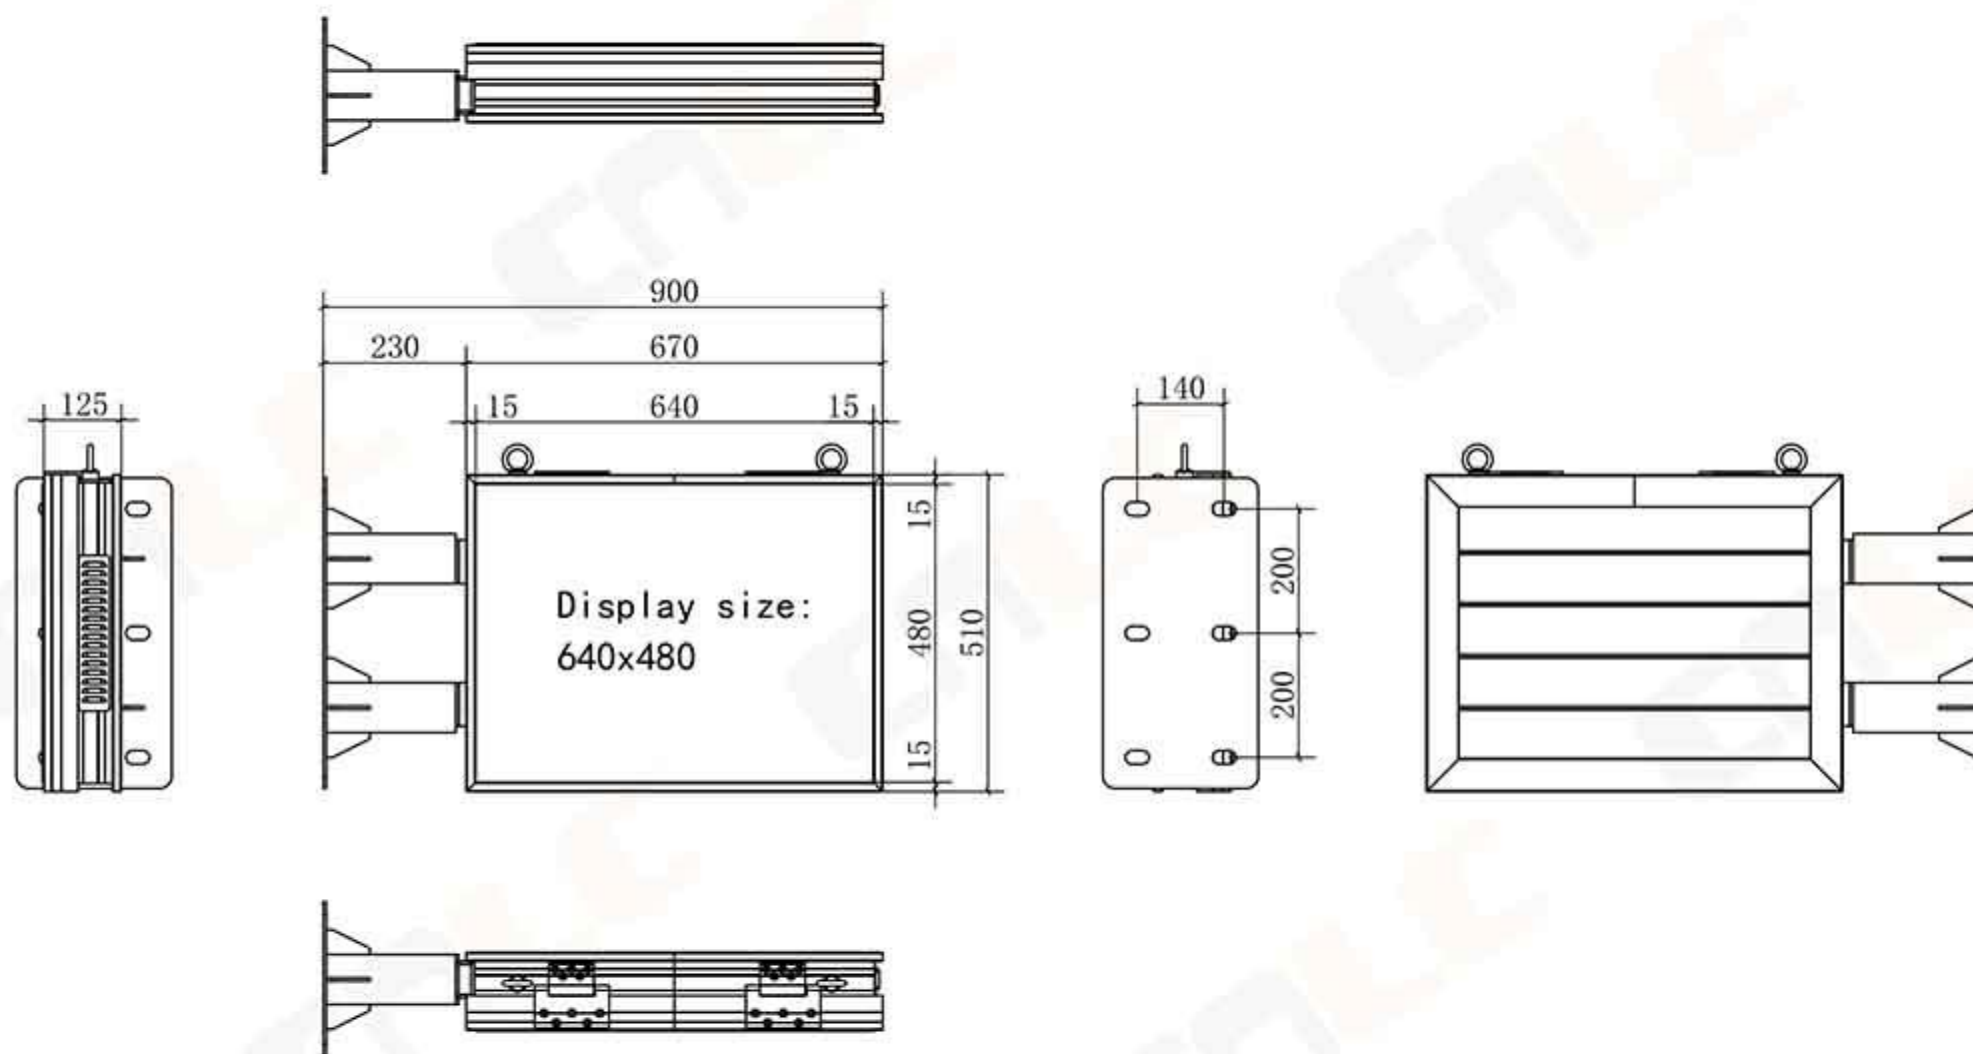



FOR MORE INFORMATION

For more information about CNLC, visit our website at www.cnlcdisplay.com. Copyright © cnlcdisplay All rights reserved. All specifications and descriptions are subject to change without notice. Reproduction without permission is prohibited.



Product Parameters

Model No.	P2.5	P3.076	P4
Pixel Pitch	2.5mm	3.076mm	4mm
Pixel Density(dots/m ²)	160,000	105,625	62,500
LED Encapsulation	SMD1415		SMD1921
Pixel configuration	1R1G1B		
Scan Mode	1/13 scan	1/16 scan	1/10 scan
Module Size	320 * 160 mm		
Horizontal/Vertical Perspective	160°/120°		
Brightness (cd/m ²)	≥5500cd/m ²	≥5000cd/m ²	≥6000cd/m ²
Max. Power Consumption	280		
Ave. Power Consumption	150		
Frame rate	60		
Refresh Rate (Hz)	≥3840Hz		
Working voltage	AC: 110V/220V		
Work environment temperature	-10°C ~ 50°C		
Work environment humidity	10% ~ 90%RH		
Service	Open the door for maintenance.		

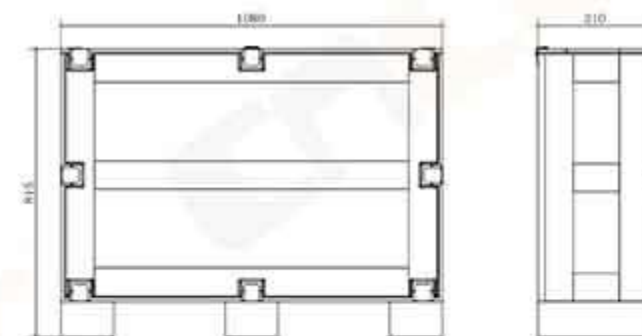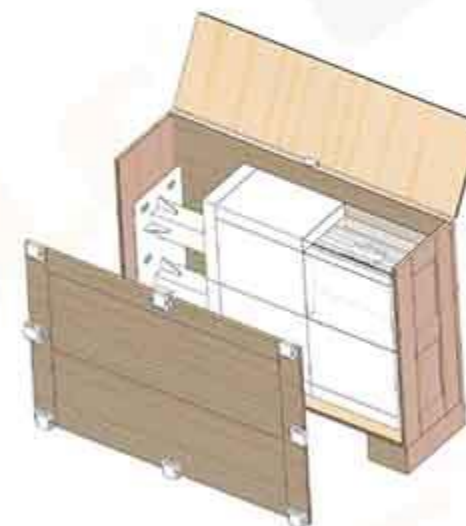

Package dimensions: 1080(L)*310(W)*815(H)
Including packaging weight: 68KG(40+28KG)

FOR MORE INFORMATION

For more information about CNLC, visit our website at www.cnlcdisplay.com. Copyright © cnlcdisplay All rights reserved. All specifications and descriptions are subject to change without notice. Reproduction without permission is prohibited.

